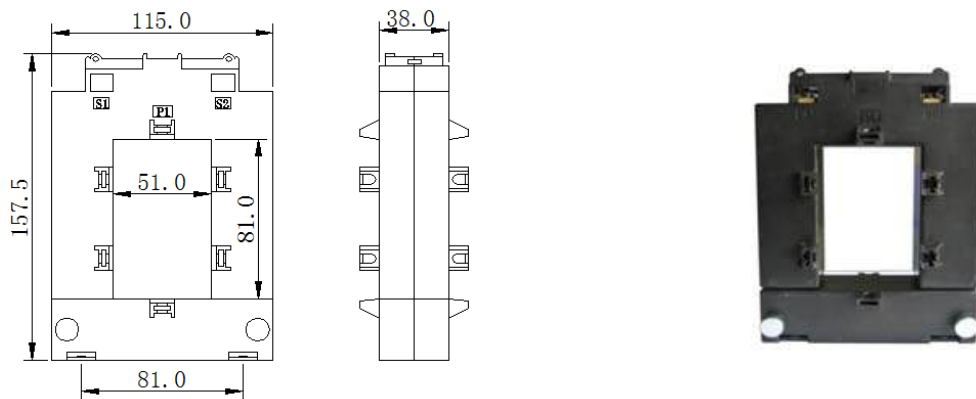


XH-80*50 Split Core Current Transformer**一、SPECIFICATIONS:**

- 1、Standard : GB1208 and IEC60044-1;
- 2、Rated Frequency: 0. 66KV;
- 3、Operating Temperature: -15℃to 45℃;
- 4、Certificates: CE

二、FEATURES:

Open type current transformer standard is mainly used in industrial city network,rural power network reconstruction project. The installation is convenient. They may be installed without opening any cable or bus-bar circuit. It does not affect thenormal use of electricity customers, save a lot of manpower, material resources,financial resources , Improve the efficiency of transformation.

三、DIMENSIONS(mm):**四、PARAMETERS:****1、Output:5A**

Model	Ratio (A)	Accuracy	Burden (VA)	Frequency	Insulation
XH-80*50	250/5	1	1.5	50/60Hz	≤3KV
	300/5	1	1.5		
	400/5	0.5	1.5		
	500/5	0.5	2.5		
	600/5	0.5	2.5		
	750/5	0.5	2.5		
	800/5	0.5	2.5		
	1000/5	0.5	5		

2、Output:1A

Model	Ratio (A)	Accuracy	Burden (VA)	Frequency	Insulation
XH-80*50	250/1	1	1.5	50/60Hz	≤3KV
	300/1	1	1.5		
	400/1	0.5	1.5		
	500/1	0.5	2.5		

开合式XH型互感器

	600/1	0.5	2.5		
	750/1	0.5	2.5		
	800/1	0.5	2.5		
	1000/1	0.5	5		